
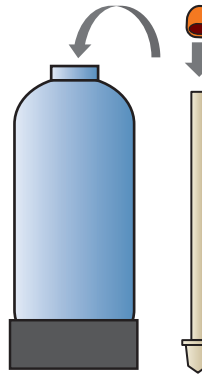


Water Softener Quick Installation Guide

Component:

(The quantity based on the design)


- ROTTEK Softener Resin
- Small Gravel
- FRP tank x 1 piece
- Riser tube and Lateral x 1 set
- Filter control valve with Diffuser x 1 set

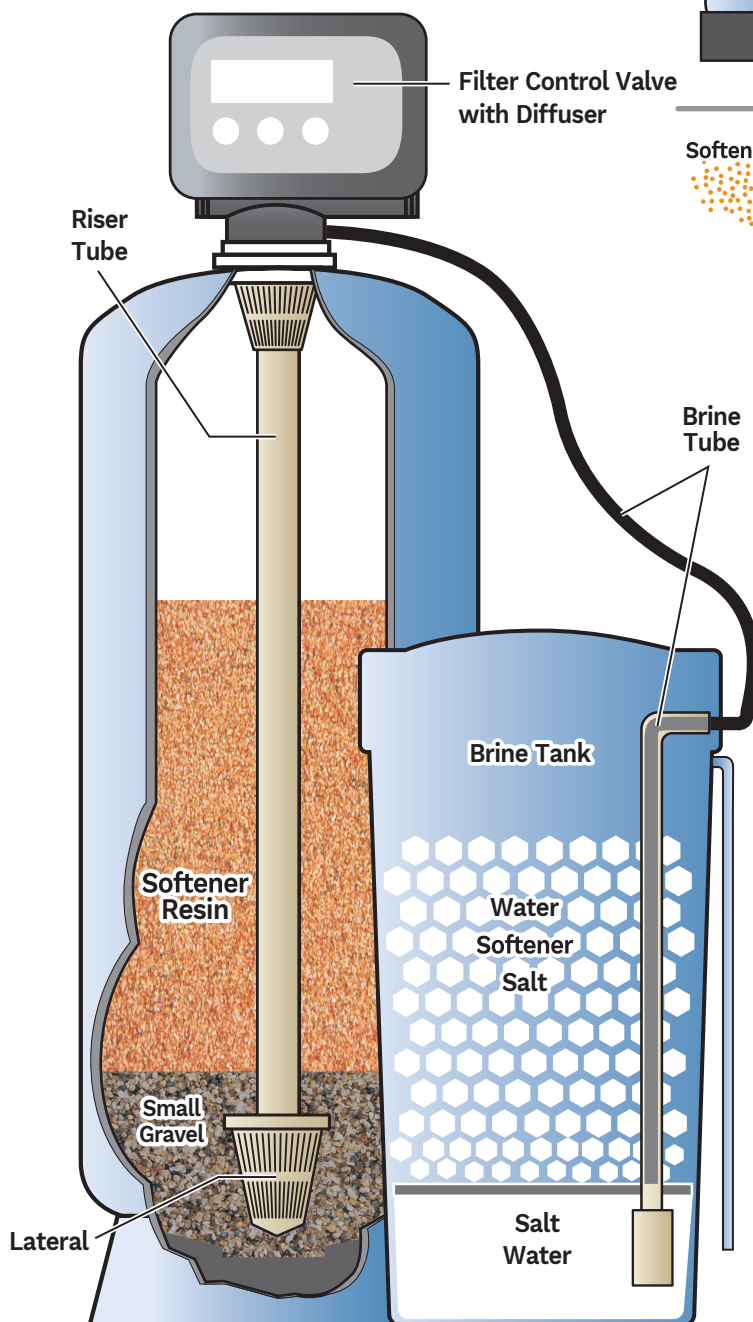

Step 1:

Temporarily seal the port of the riser tube assembly (with lateral) to prevent unintentional introduction of filter media during the loading process into the FRP tank, which may cause blockages.

Position the riser tube assembly within the FRP tank, ensuring that the riser tube is centered, facilitating a convenient connection to the control valve.



Step 2:

Place small gravel into the FRP tank first, ensuring that evenly covers the lateral at the bottom of the tank.

Step 3:

Proceed with softener resin, spread it evenly over the small gravel.

Depending on the capacity of the system, the standard quantity will fill the tank to about 1/2 to 2/3.

Step 4:

Unseal the port of the riser tube and install the control valve with the diffuser.

Please refer to the original manual for guidance on setting up the control valve.

Step 5:

Put an appropriate amount of water softener salt into the brine tank. Generally, about 2/3 full.

Then connect the brine tank to the softener filter control valve with the brine tube.

Note:

The type and amount of filter material used will depend on the specific equipment and design. Ratios and quantities may vary accordingly.