

Panel Light - 72W

Model Number: VL PL-60120

Features:

- ▶ High power-efficiency
- ▶ Low structure
- ▶ Flat light surface
- ▶ Low temperature
- ▶ Long service life

Application:

- ▶ Offices
- ▶ Shops
- ▶ Schools
- ▶ Hospitals
- ▶ Technical facilities



6480
lm

90
lm/W

≥80
Ra

Optical Information

Color Temperature	3000K, 4000K, 6000K
Lumen Output (lumen)	6480
Optics	110°
CRI	≥80
Led Chip	SMD4014
Led quantity	n/a
Lumen Maintenance (L70)	30,000h

Environmental Factor

Operating Temperature	-25 ~ +50°C
Protection Level	IP40
Warranty	5 years

Mechanical Information

Dimensions (W x L x H)	1195mm x 595mm x 10mm
Weight	7.0kg
Material	Aluminum, PCP
Power supply*	Flicker Free

*Also available: Standard, Triac dimmer, 0/1V-10C Dimmer, Push Dimmer, DALI

Electrical Information


Input Voltage	AC100-240V 50-60Hz
Power Consumption	72W
Dimmibility	Available

Panel Light - 72W

Model Number: VL PL-60120

Dimensions


in mm

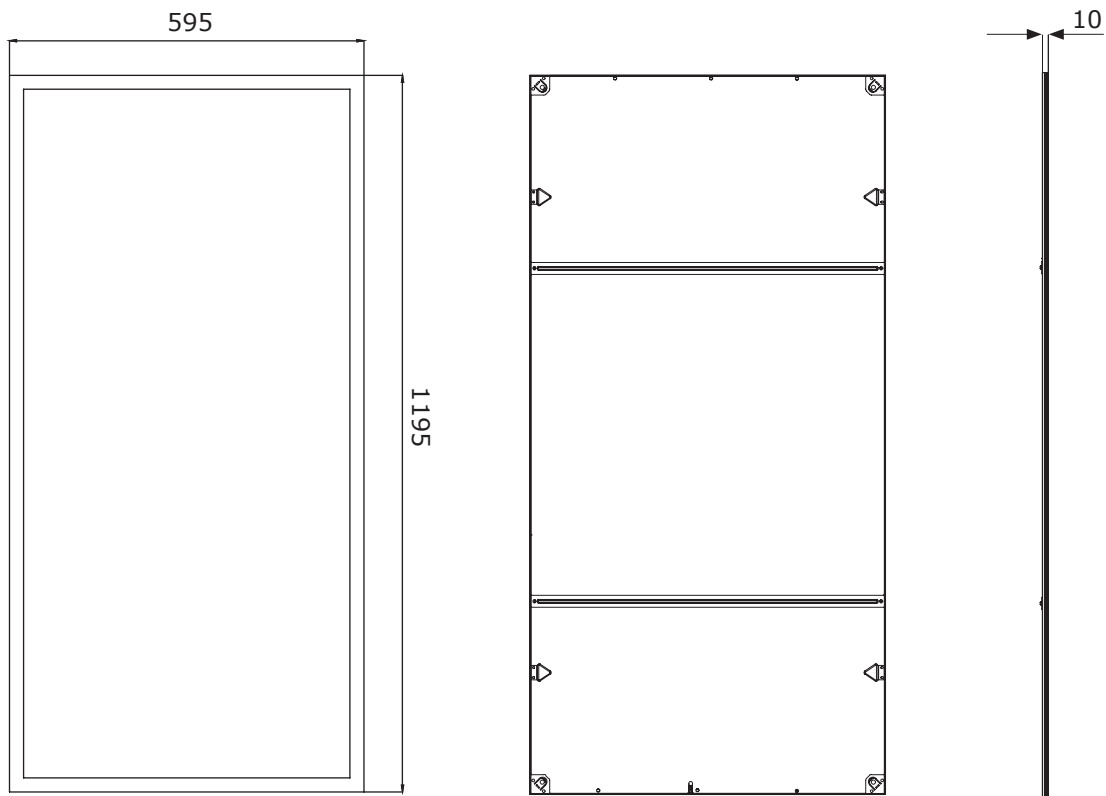

Product Description:



Surface-Mounted Frame

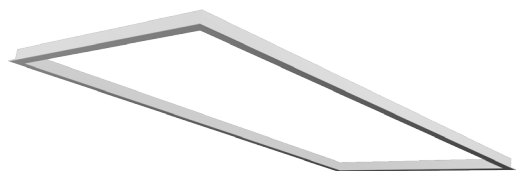


Recessed Frame


Panel Light - 72W

Model Number: VL PL-60120

Photometrics

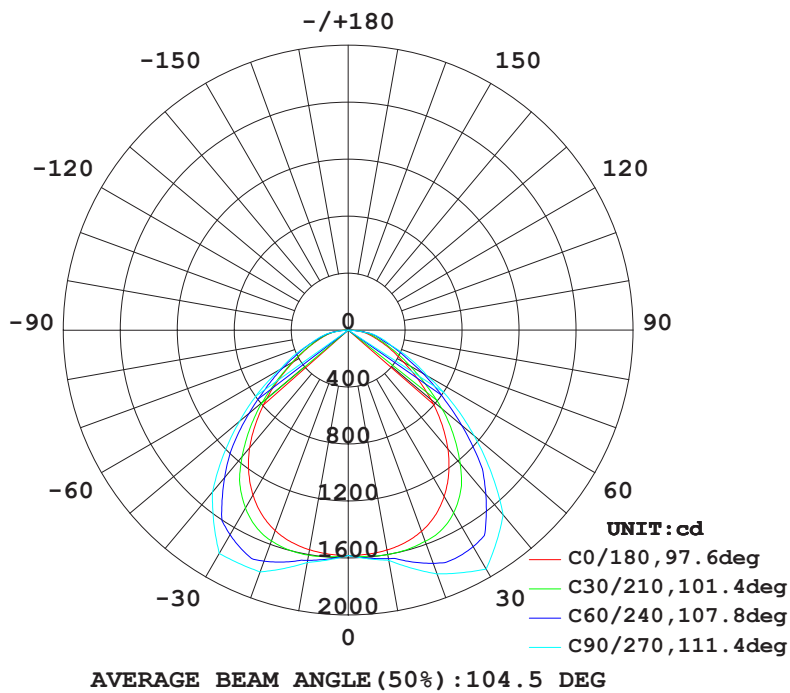

Illuminance at Distance

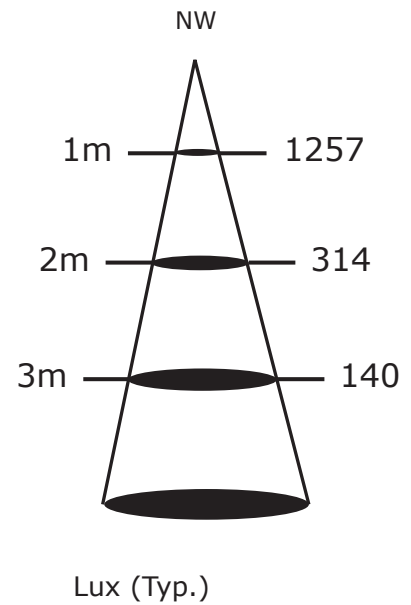

Power	Product Numbers	Electrical Numbers (in Finland)	Beam Angle	CCT	lux @ 1m	Lumen (lm)
72W	VL PL-60120-72-FW1		110°	3000K		90
	VL PL-60120-72-FN1	4226779	110°	4000K	1257	
	VL PL-60120-72-FB1		110°	6000K		

Also available:
 Color Temperature: 5000K
 Power: 50W and 54W
 Power supply:
 Standard, Triac dimmer, 0/1V-10C Dimmer, Push Dimmer, DALI

