

Panel Light - 18W

Model Number: VL PL-3030

Features:

- ▶ High power-efficiency
- ▶ Low structure
- ▶ Flat light surface
- ▶ Low temperature
- ▶ Long service life

Application:

- ▶ Offices
- ▶ Shops
- ▶ Schools
- ▶ Hospitals
- ▶ Technical facilities



1620
lm

90
lm/W

≥80
Ra

Optical Information

Color Temperature	3000K, 4000K, 6000K
Lumen Output (lumen)	1620
Optics	110°
CRI	≥80
Led Chip	SMD4014
Led quantity	n/a
Lumen Maintenance (L70)	30,000h

Environmental Factor

Operating Temperature	-25 ~ +50°C
Protection Level	IP40
Warranty	5 years

Mechanical Information

Dimensions (W x L x H)	295mm x 295mm x 10mm
Weight	2.2kg
Material	Aluminum, PCP
Power supply	Standard

Electrical Information


Input Voltage	AC100-240V 50-60Hz
Power Consumption	18W
Dimmability	n/a

Panel Light - 18W

Model Number: VL PL-3030

Dimensions


in mm

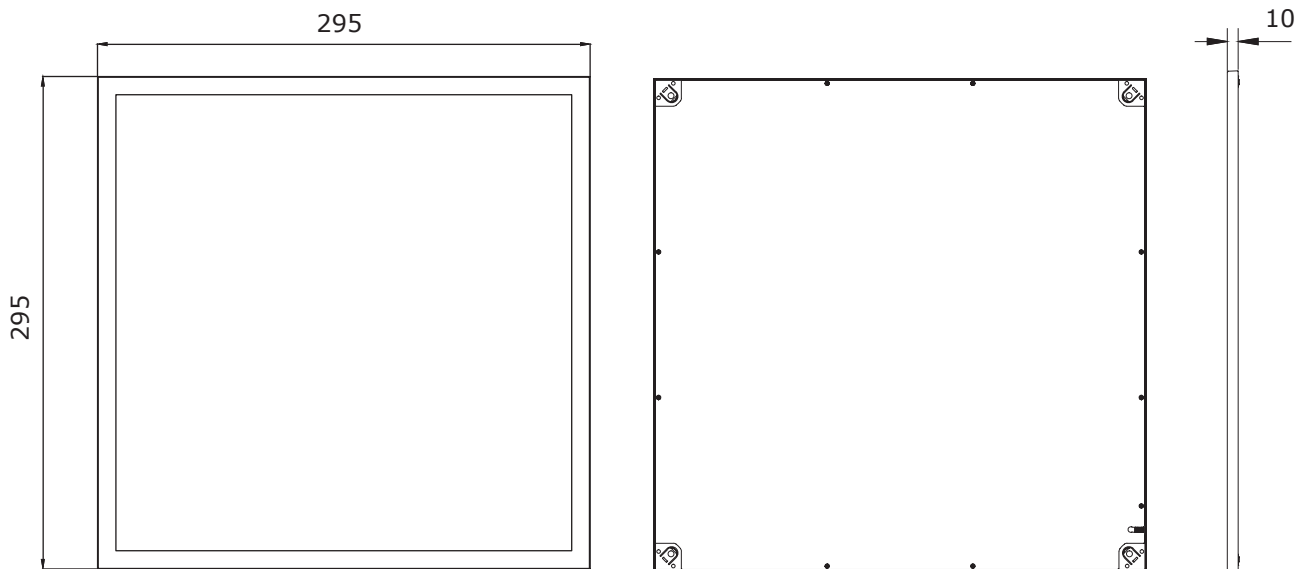


Panel Light - 18W

Model Number: VL PL-3030

Photometrics

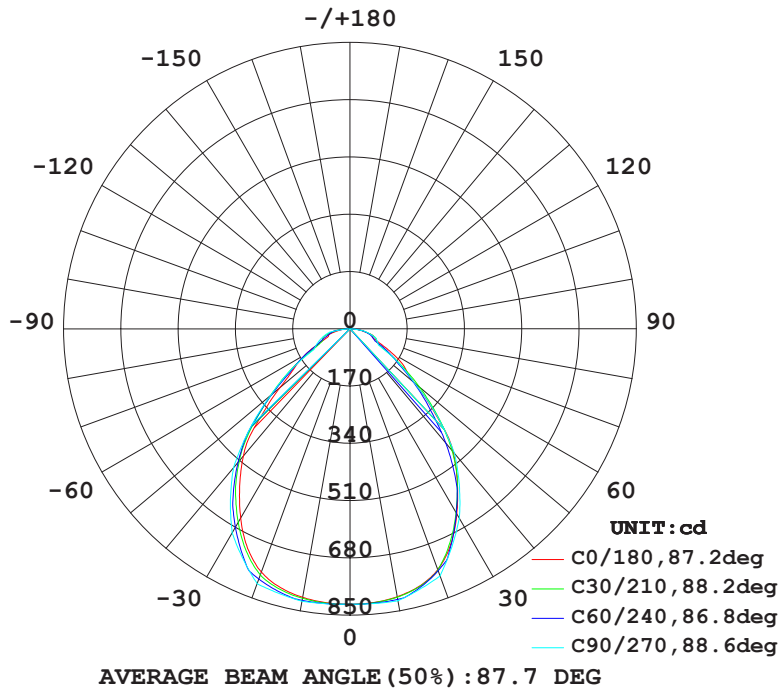

Illuminance at Distance

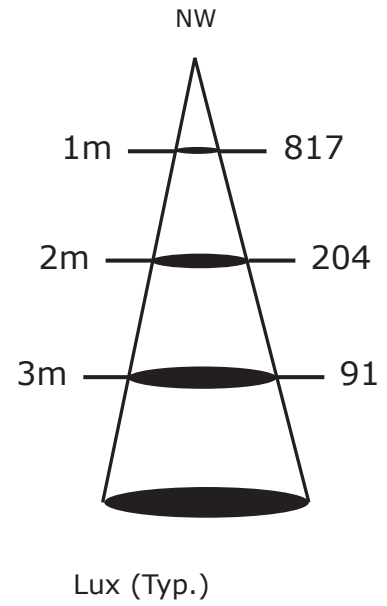

Power	Product Numbers	Electrical Numbers (in Finland)	Beam Angle	CCT	lux @ 1m	Lumen (lm)
18W	VL PL-3030-18-AW1		110°	3000K		90
	VL PL-3030-18-AN1	4226710	110°	4000K	817	
	VL PL-3030-18-AB1		110°	6000K		

Also available:
Color Temperature: 5000K

